



ALIBI® Security


Solutions for Security Professionals

FALL 2023 | 127



24 NEW CAMERAS AND RECORDERS—INSIDE!

Video Security Product & Solution Guide

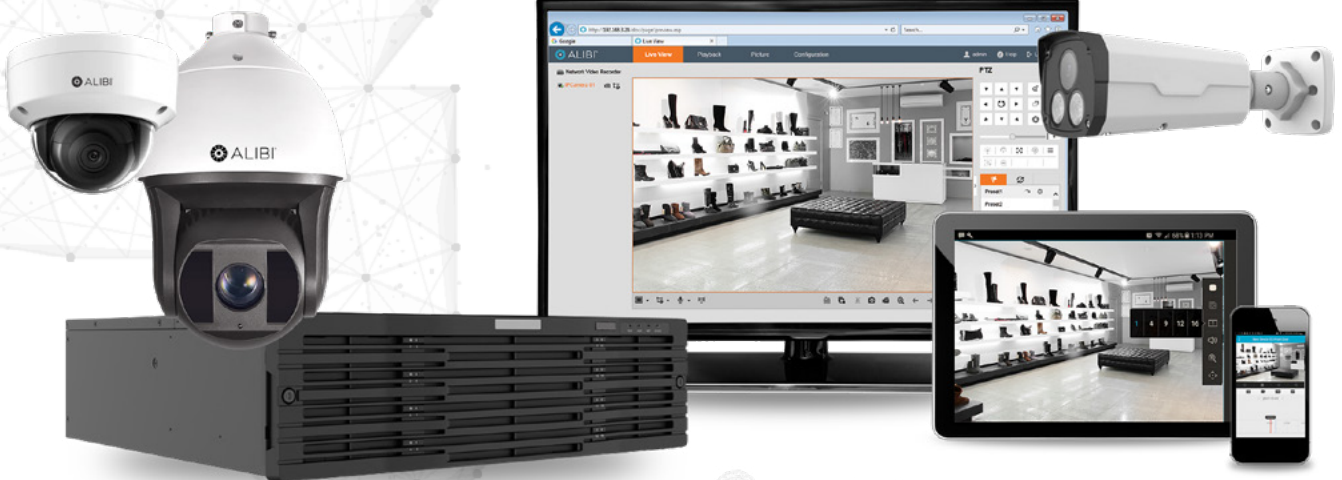

 ALIBI® Vigilant
On-Premise Video
Security Solutions

 ALIBI® Hybrid Cloud
On-Prem Cloud Backup
+ AI Analytics

 ALIBI® Cloud VS
Cloud-Based
Video Surveillance

We're Committed to **Growing YOUR Business!**

SEE PAGE 3 ▶

ALIBI® Security



Alibi Security is a trusted source for innovative, reliable video surveillance and access control solutions—serving thousands of security professionals for more than 30 years. We are committed to treating every customer as a true partner—taking the time to understand their needs and investing in the **PEOPLE, SOLUTIONS** and **SUPPORT** required to make them successful.

OUR VISION
To be the most trusted and recommended source for security solutions.

OUR MISSION
To make our communities safer, smarter and more secure.

OUR COMMITMENT
To understand your needs and exceed your expectations.

What's Inside

ALIBI® PRODUCTS & ACCESSORIES

- Key Features & Benefits 4
- Analytics Overview 5
- Network Video Recorders 8
- Camera Technology & Optics 12
- Cameras 14
- Brackets & Accessories 29

ALIBI® CLOUD VS

- Cloud to Cloud Surveillance 30

ALIBI® HYBRID CLOUD

- Cloud Backup + AI Analytics 31

Proudly Headquartered in Austin, Texas

Call to speak with a security expert today: **888.858.1440**



SCAN HERE



Learn more about our **Mission and Commitment to You** in our "Expect More" video

We do our best to ensure all information in this catalog is accurate and up-to-date. However, pricing is subject to change at any time, and we reserve the right to correct any errors in pricing or product information.

Alibi Security: Your Partner in Growth

Our entire business has been designed to support you, the Security Professional. When you do business with Alibi Security, you get much more than quality products at competitive prices—you get a dedicated business partner who listens to **your needs**, and is invested in **your growth**.



The Latest Technology

Our differentiated, limited-distribution on-premise and cloud-based solutions enable you to **stand out from the competition**.



Protected Pricing Policies

Competitive everyday pricing, dealer volume discounts, and strictly enforced MAP policies **protect your margin opportunities**.



Dedicated Account Managers

A single point of contact for pre- and post-sales support to ensure you **close more business** and **stay on schedule**.



US-Based Technical Support

Our technical support team is located in Austin, TX and delivers industry leading response times. **One call, problem solved.**



Dealer-Friendly Fulfillment

Our supply chain and fulfillment operations ensure that the products you need are **in stock** and **delivered on time**.



Product Integration Capabilities

We employ a full-time team to help with installation, customization and configuration services to **make your job easier**.

Alibi Arsenal: Tools to Help You Grow

We understand that marketing can be expensive, time-consuming and frustrating. So we developed a powerful marketing platform, based on Dealer feedback, to deliver professional content, and provide turnkey tools and services—all designed to **elevate your brand**, and **help grow your business**.



Branded Resources

ALL Dealers are provided a FREE website, featuring sales & marketing resources, **branded for YOUR business**



Customer Reviews Engine

Our TURNKEY reviews engine makes it easy to **generate positive reviews for YOUR business** in 3 simple steps.




Email Marketing Campaigns

We offer TURNKEY email campaigns, to reach targeted prospects and **promote YOUR solutions & services**.

Getting Started Is Easy and FREE!

Simply contact your Dedicated Account Manager, or call the Alibi Arsenal Hotline at **877.662.7502**

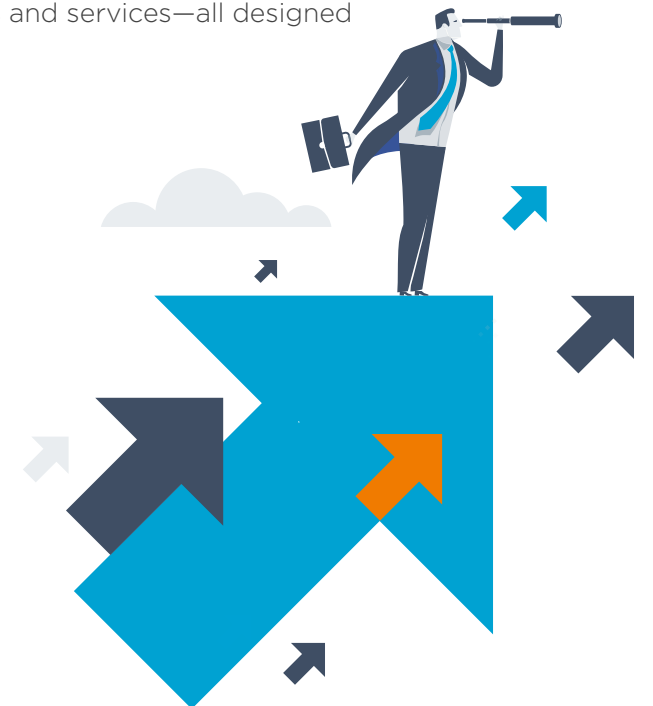

High-Performance Solutions For Virtually Any Security Challenge

Uncompromising Performance...Unparalleled Usability

We believe in delivering video security solutions that simply work. Our goal is to provide you video solutions for a variety of applications and any budget. Alibi solutions are designed—based on dealer partner feedback—to deliver the best possible user experience, from installation to operation.

Alibi Vigilant Gear Delivers High-Performance Solutions For any Security Challenge:

- ✓ Ultra high res—up to 8MP / 4K options
- ✓ Cloud-enabled P2P system management
- ✓ Starlight models—for low light applications
- ✓ Up to 128-channel network recorders
- ✓ Ultra H.265 compression technology
- ✓ Long distance power-over-ethernet
- ✓ Intuitive, full-featured user interface
- ✓ Powerful analytics like human and vehicle detection





 All Vigilant gear has been approved by the Federal Communications Commission.

 **NDA 2020**
★★★★★
Products that meet technical specifications under NDAA Section 889 Part A.

Built to Last...Guaranteed!

Alibi Partners enjoy one of the most comprehensive support programs in the industry


We offer an unparalleled 3-Year Blanket Warranty for most Alibi products, covering your entire purchase – no asterisks, no exceptions. Alibi gear is field-proven with less than a 1% defective rate. If for some reason the gear you receive needs to be replaced, our Advance Replacement Programs ensures you can get your customers back up and running fast!

Comprehensive support means **We've Got Your Back!**

Powerful Video Analytics Included

Want more from your security solution?

All Alibi video surveillance solutions support powerful video analytics. From motion alerts, to human detection to line crossing, our cameras and recorders help you build powerful, effective security solutions for your customers.


Set up real-time alerts & notifications



Intrusion Detection

Object recognition in a defined zone. Set criteria based on object size and time duration.



Line Crossing

Provides alerts when objects cross a virtual fence (choose single or bi-directional)




Audio Exception Detection

Detects sudden changes in sound intensity



Tamper Detection

Sends an alert if the viewing angle changes, or has been blocked

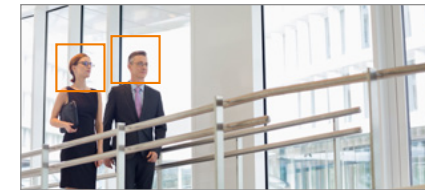

Face Detection

Detects and provides snapshots of faces to aid in identification



Unattended Baggage

Detects suspicious objects and unattended baggage



Object Moving

Stationary item moves from its location but stays in scene



Defocus Detection

Notifies of loss of image sharpness as a result of defocusing or dirtying of the camera lens



Scene Change Detection

Detects changes to the reference frame, such as if the camera angle changes



Object Removal Detection

Detects objects that are left or removed from a scene



People Counting

Provides directional counting information



Human/Vehicle Detection


Accurate human and vehicle detection driven by AI technology

Alibi Vigilant Firmware: Powerful Features, Easy to Use

All Alibi Vigilant gear features powerful firmware that makes the solution easy to setup and manage. Plus, you get access to a powerful mobile app that puts powerful security features in your customer's hands—literally.

Intuitive Firmware with Powerful Features

Alibi Vigilant recorders and cameras include the latest firmware featuring simple navigation, smart analytics and powerful cloud capabilities to make managing and updating the system easy.

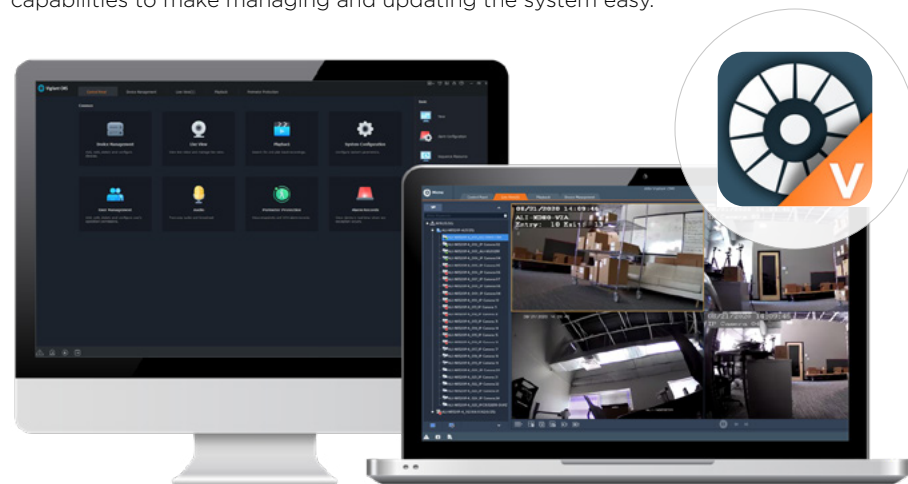

Key features of Alibi Vigilant firmware include:

- **Intuitive User Interface** Simple to navigate and use
- **Unified Device Management** IP cameras, DVRs, NVRs, storage servers, stream servers, video wall controllers, etc.
- **Flexible Recording:** Local recording, alarm-triggered recording, scheduled recording, and recording download
- **Auto Device Search:** Add devices by domain name/IP address; add devices and adjust the time in batch configuration
- **Flexible Live View Configs:** Up to 64 live view channels (on up to 4 monitors) and sequence display, corridor mode, two-way audio, and audio broadcast
- **Smart Playback:** Retrieve footage by time/event, local/remote playback, async/sync playback, VOD for different speed, smart search and SD card search
- **PTZ Controls:** Pan, tilt, zoom, 3D positioning, preset, patrol, pattern, and patrol plan
- **Analytics Reporting:** Generate statistics against enabled analytics; daily/weekly/monthly/yearly report export



Configuration & Management Tools

Alibi Vigilant Toolbox is a comprehensive suite of tools that help you configure, troubleshoot and manage solutions.

- » **Device Management:** Search for devices; Change device password and IP; Configure device remotely including device name, time and network.
- » **Channel Management:** Configure the image, encoding, OSD, and audio (for IPC only) settings.
- » **Batch upgrade:** Upgrade devices using an upgrade file on the PC; Upgrade devices with Internet connection.
- » **Device Maintenance:** Restore device to default settings; Import and export device configuration; export diagnosis info; Restart device.
- » **IP Camera & NVR Channel Management:** Add or delete channels.
- » **Storage calculator:** Calculate the allowed recording time based on the given disk space; Calculate the required disk space based on the given recording time.



The Power of the Cloud

Vigilant makes it easy for you and your customers to setup and manage security solutions leveraging embedded cloud functionality.

Cloud P2P for Secure Remote Viewing

No more port forwarding for remote access. Every Vigilant solution comes with a FREE P2P service that allows you to setup secure remote viewing for your customers using the Vigilant mobile app. Now your customers can access their system and share access securely without worrying about open ports and network vulnerabilities.


Cloud Firmware Updating

Every Vigilant recorder and camera can be updated remotely using the cloud. No more rolling trucks to update firmware. Keeping your customer's solutions up to date and protected is easy.

Alibi Vigilant Mobile App

Securely view and manage your system anywhere in the world


- Simple set up using a P2P account ... no more port-forwarding!
- Centrally manage user rights & permissions for an unlimited number of recorders or cameras
- Supports up to 256 channels
- Activate cloud firmware updates directly from the app
- Take snapshots or record live video directly from your mobile device
- Store up to 16 Alibi devices at once
- Add, delete, or modify connected devices
- Manage PTZ camera controls using your touchscreen
- Digitally zoom in during live video or remote playback modes
- Mix and match live views to access multiple Alibi recorders and IP cameras
- Compatible with Alibi Vigilant DVRs, NVRs, IP cameras and PTZs

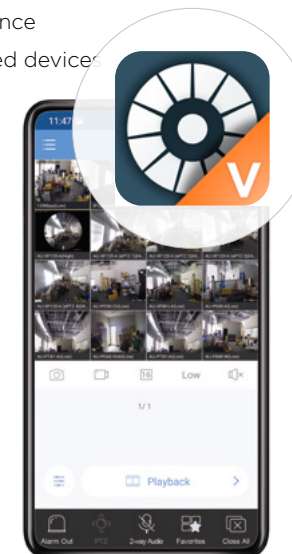

iOS/Android Compatible  

The Advantages of Ultra H.265: Reduce Bandwidth and Storage Requirements up to 80%

Ultra H.265 is the latest video compression format that offers a vast improvement in image quality and bandwidth over older generation technologies. It also allows for faster, more fluid remote viewing, and the ability to view more channels remotely.

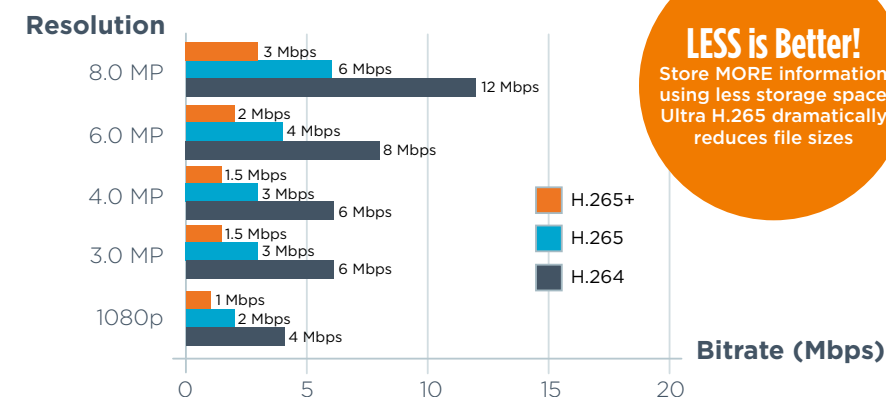

Vigilant How-to Resources

Looking to add the Vigilant line to your video security offerings but don't know where to start? Want to get your techs ramped up installing and managing Vigilant? Visit the Alibi Security YouTube channel and find everything you need to learn about this powerful line of cameras and recorders.

 **More than 250 Videos Available 24/7**

Flex Series Network Recorders

Features Include:

- ▶ Support Ultra 265/H.265/H.264 video formats
- ▶ Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- ▶ ALI-NR041F-1 features HDMI and VGA simultaneous outputs
- ▶ ALI-NR081F-2 & ALI-NR161F-2 feature HDMI and VGA independent outputs
- ▶ Up to 4K resolution recording
- ▶ 10TB-20TB Total Storage
- ▶ Support Cloud firmware updates
- ▶ All three recorders are NDA compliant



ALI-NR041F-1



ALI-NR081F-2
ALI-NR161F-2

	4-Channel Network Video Recorder	RACK-MOUNTABLE 8-Channel ULTRA H.265 NVR	RACK-MOUNTABLE 16-Channel ULTRA H.265 NVR
	ALI-NR041F-1	ALI-NR081F-2	ALI-NR161F-2
IP VIDEO INPUT	4-ch	8-ch	16-ch
TWO-WAY AUDIO INPUT	1-ch, RCA	1-ch, RCA	1-ch, RCA
INCOMING BANDWIDTH	80Mbps	320Mbps	320Mbps
OUTGOING BANDWIDTH	64Mbps	160Mbps	320Mbps
REMOTE USERS	128	128	128
PROTOCOLS	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
RECORDING RESOLUTION	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
AUDIO OUTPUT	1-ch, RCA	1-ch, RCA	1-ch, RCA
SYNCHRONOUS PLAYBACK	4-ch	8-ch	16-ch
DECODING FORMAT	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra265/H.265/H.264
LIVE VIEW/PLAYBACK	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
CAPABILITY	Ultra 265/H.265: 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 9 x 4MP@25, 10 x 3MP@30, 16 x 1080P@30 H.264: 3 x 4K@30, 5 x 5MP@30, 7 x 4MP@30, 8 x 4MP@25, 9 x 3MP@30, 14 x 1080P@30	1 x 12MP@30, 2 x 4K@30, 5 x 4MP@30, 8 x 1080P@30	1 x 12MP@30, 2 x 4K@30, 5 x 4MP@30, 10 x 1080P@30, 16 x 720P@30
SATA	1 SATA interfaces	2 SATA interface	2 SATA interfaces
CAPACITY	Up to 8TB for each disk	up to 10TB for each disk	Up to 10TB for each disk
VCA DETECTION BY CAMERA	Face Detection, Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, SMD(Smart Motion Detection)	Face detection, Face comparison, Intrusion detection, Cross line detection, Enter area, Leave area, Defocus detection, Scene change detection, Object left behind, Object removed, Auto tracking	Face detection, Face comparison, Intrusion detection, Cross line detection, Enter area, Leave area, Defocus detection, Scene change detection, Object left behind, Object removed, Auto tracking
VCA SEARCH	Face Search, Behavior Search, People Counting Report	Face search, Face comparison search, Behavior search, Vehicle search	Face search, Face comparison search, Behavior search, Vehicle search
POWER SUPPLY	48V DC/1.35A Power Consumption: ≤10 W (without HDD)	100 - 240V AC Power Consumption: ≤10 W (without HDD)	100 - 240 V AC Power Consumption: ≤10W(without HDD)
WORKING ENVIRONMENT	14°F - +131°F, Humidity ≤ 90% RH (non-condensing)	14°F - +131°F, Humidity ≤ 90% RH (non-condensing)	14°F-+131°F, Humidity ≤ 90% RH (non-condensing)
DIMENSIONS (W×D×H)	10.2" × 8.7" × 1.8"	15.0" × 12.4"× 2.1"	15.0" × 12.4"× 2.1"
NDA COMPLIANT	Yes	Yes	Yes

Performance Series Network Recorders

Powerful features include:

- ▶ 16-32 Channel Count Support
- ▶ H.265, H.264 Compression
- ▶ Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- ▶ HDMI and VGA independent outputs
- ▶ Up to 12MP recording resolution
- ▶ Support Cloud firmware updates
- ▶ RJ-45 Ethernet Interface



ALI-NR161P-4



ALI-NR321P-8

	RACK-MOUNTABLE 16-Channel Ultra H.265 NVR	RACK-MOUNTABLE 32-Channel Ultra H.265 NVR
	ALI-NR161P-4	ALI-NR321P-4
IP VIDEO INPUT	16-ch	32-ch
TWO-WAY AUDIO INPUT	1-ch, RCA	1-ch, RCA
INCOMING BANDWIDTH	320Mbps	320Mbps
OUTGOING BANDWIDTH	320Mbps	320Mbps
REMOTE USERS	128	128
PROTOCOLS	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
RECORDING RESOLUTION	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
AUDIO OUTPUT	1-ch, RCA	1-ch, RCA
SYNCHRONOUS PLAYBACK	16-ch	16-ch
DECODING FORMAT	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264
LIVE VIEW/PLAYBACK	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
CAPABILITY	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25
SATA	4 SATA interface	4 SATA interface
CAPACITY	up to 10TB for each disk	up to 10TB for each disk
VCA DETECTION	Face detection, Face comparison, Intrusion detection, Cross line detection, Enter area, Leave area, Defocus detection, Scene change detection, Object left behind, Object removed, Auto tracking	Face detection, Face comparison, Intrusion detection, Cross line detection, Enter area, Leave area, Defocus detection, Scene change detection, Object left behind, Object removed, Auto tracking
VCA SEARCH	Face search, Face comparison search, Behavior search, Vehicle search	Face search, Face comparison search, Behavior search, Vehicle search
STATISTICAL ANALYSIS	People counting	People counting
POWER SUPPLY	100 - 240 V AC Power Consumption: ≤15W(without HDD)	100 - 240 V AC Power Consumption: ≤15W(without HDD)
WORKING ENVIRONMENT	14°F-+131°F, Humidity ≤ 90% RH (non-condensing)	14°F-+131°F, Humidity ≤ 90% RH (non-condensing)
DIMENSIONS (W×D×H)	15.7" × 14.3"× 2.9"	15.7" × 14.3"× 2.9"
NDA COMPLIANT	Yes	Yes



SEAGATE

Surveillance-Class Hard Drive

Skyhawk surveillance-class hard drives are specifically designed for capturing and storing security video. They reduce frame loss, improve playback and minimize interruptions. These drives also have Smart features that improve the maintenance and reliability of video capture.

**Pre-installed HDDs are mounted, formatted, initialized, and supported by Alibi Security.*

Performance Series Network Recorders

Network Video Recorder

- Support Ultra 265/H.265/H.264 video formats
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C,



ALI-NR321P-8
ALI-NR640P-8

ALI-NR1280X-16

Flex Series Hybrid Recorders

Powerful hybrid technology supports both IP and HD-TVI Cameras

- Support 1 channel HDMI output, 1 channel VGA output up to 1920*1080
- Long transmission distance over coaxial cable



ALI-HR042F-1
ALI-HR082F-1

ALI-HR162F-2



SEAGATE

Surveillance-Class Hard Drive

Skyhawk surveillance-class hard drives are specifically designed for capturing and storing security video. They reduce frame loss, improve playback and minimize interruptions. These drives also have Smart features that improve the maintenance and reliability of video capture.

*Pre-installed HDDs are mounted, formatted, initialized, and supported by Alibi Security.

	RACK-MOUNTABLE	RACK-MOUNTABLE	RACK-MOUNTABLE
	NEW! 32-Channel Ultra H.265 NVR	NEW! 64-Channel Ultra H.265 NVR	128-Channel ULTRA H.265 NVR with RAID
	ALI-NR322P-8	ALI-NR641P-8	ALI-NR1280X-16
IP VIDEO INPUT	32-ch	64-ch	128-ch
TWO-WAY AUDIO INPUT	1-ch, RCA	1-ch, RCA	1-ch, RCA
INCOMING BANDWIDTH	320Mbps	320Mbps	512 Mbps
OUTGOING BANDWIDTH	160Mbps	160Mbps	384 Mbps
REMOTE USERS	128	128	128
PROTOCOLS	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP	P2P, UPnP, NTP, DHCP, PPPoE
RECORDING RESOLUTION	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
AUDIO OUTPUT	1-ch, RCA	1-ch, RCA	1-ch, BNC
SYNCHRONOUS PLAYBACK	16-ch	16-ch	16-ch
DECODING FORMAT	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264
LIVE VIEW/PLAYBACK	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
SATA	8 SATA interfaces	8 SATA interfaces	16 SATA interfaces
CAPACITY	Up to 12TB for each disk	Up to 12TB for each disk	up to 10TB for each HDD
VCA DETECTION	Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, UMD(Ultra Motion Detection)	Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, UMD(Ultra Motion Detection)	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object Left Behind, Object Removed
VCA SEARCH	Behavior Search, People Counting Report, Vehicle Search	Behavior Search, People Counting Report, Vehicle Search	Face search, Behavior search
NETWORK INTERFACE	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface
USB INTERFACE	Front: 2 x USB2.0, Rear panel: 1 x USB3.0	Front: 2 x USB2.0, Rear panel: 1 x USB3.0	Rear panel: 4 x USB3.0
POWER SUPPLY	100-240V AC Power Consumption: ≤ 32W (without HDD)	100-240V AC Power Consumption: ≤ 32W (without HDD)	100 - 240V AC Input / 12VDC 25A Output Power Consumption: ≤ 50 W (without HDD)
WORKING ENVIRONMENT	14°F-131°F	14°F-131°F	14°F-131°F
DIMENSIONS (W×D×H)	17.4" × 16.8" × 3.5"	17.4" × 16.8" × 3.5"	18.8" × 19.0" × 5.1"
WEIGHT (WITHOUT HDD)	8.80lb	8.80lb	22.05 lb
NDAA COMPLIANT	Yes	Yes	Yes

			RACK-MOUNTABLE
	4-Channel 8MP Analog	8-Channel 8MP Analog + 8MP IP	16-Channel 8MP Analog + 8MP IP
	ALI-HR042F-1	ALI-HR082F-1	ALI-HR162F-2
ANALOG VIDEO INPUT	4-ch, BNC	8-ch, BNC	16-ch, BNC
IP VIDEO INPUT	2-ch(only IP up to 6ch), each channel up to 4MP	4-ch(only IP up to 12ch), each channel up to 8MP	8-ch(only IP up to 24ch), each channel up to 4K
AUDIO INPUT	1-ch, RCA	1-ch, RCA	1-ch, RCA
CVBS OUTPUT	1-ch, BNC	1-ch, BNC	1-ch, BNC
AUDIO OUTPUT	1-ch, RCA	1-ch, RCA	1-ch, RCA
SYNCHRONOUS PLAYBACK	4	8	16
LIVE VIEW DISPLAY	HDMI/VGA: 1/4/6/8/9	HDMI/VGA: 1/4/6/8/9/16	HDMI/VGA: 1/4/6/8/9/16/25
TWO-WAY AUDIO	1-ch, RCA	1-ch, RCA	1-ch, RCA
INCOMING BANDWIDTH	40Mbps (Up to 48Mbps after all analog channel conversion)	40Mbps (Up to 56Mbps after all analog channel conversion)	80Mbps (Up to 112Mbps after all analog channel conversion)
OUTGOING BANDWIDTH	48Mbps	64Mbps	160Mbps
RECORDING RESOLUTION	8MP Lite/5MP/5MP Lite/4MP Lite/1080P/720P/CIF	8MP Lite/5MP/5MP Lite/4MP Lite/1080P/720P/CIF	8MP Lite/5MP Lite/4MP Lite/1080P/720P/960H/D1/CIF
RECORDING FRAME RATE	Main stream: 8MP Lite@8fps, 5MP Lite @12fps, 4MP Lite@15fps, 1080P@15fps, 720p@30fps Sub stream: D1@8fps, D1@12fps, D1@15fps, D1@15fps, D1@30fps	Main stream: 8MP Lite@8fps; 5MP Lite @12fps; 4MP Lite@15fps; 1080P@15fps; 720p@30fps Sub stream: D1@8fps; D1@12fps; D1@15fps; D1@15fps; D1@30fps	Main stream: 8MP Lite@8fps, 5MP Lite@12fps, 4MP Lite@15fps, 1080P@15fps, 720P@30fps Sub stream: D1@8fps, D1@12fps, D1@12fps, D1@15fps, D1@15fps, D1@30fps
CAPABILITY	Analog: 4 x 8MP Lite@8, 4x 5MP Lite@12, 4x 4MP Lite@15, 4 x 1080P@15 IP: 1 x 4MP@30, 2 x 1080P@30	Analog: 8 x 8MP Lite@8, 8x 5MP Lite@12, 8x 4MP Lite@15, 4 x 1080P@15 IP: 1 x 8MP@30, 2 x 4MP@30, 4 x 1080P@30	Analog: 16 x 8MP Lite@8, 16x 5MP Lite@12, 16x 4MP Lite@15, 16 x 1080P@15 IP: 24 x D1@30, 16 x 720P@30, 8 x 1080P@30
SATA	1 SATA interface	1 SATA interface	2 SATA interfaces
CAPACITY	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)
GENERAL ALARM	Motion detection	Motion detection	Motion detection
USB INTERFACE	Rear panel: 2 x USB2.0	Rear panel: 2 x USB2.0	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
WORKING ENVIRONMENT	-10°C - + 55°C (+14°F - +131°F), Humidity ≤ 90% RH(non-condensing)	-10°C - + 55°C (+14°F - +131°F), Humidity ≤ 90% RH(non-condensing)	-10°C-+ 55°C (+14°F-+131°F), Humidity ≤ 90% RH (non-condensing)
DIMENSIONS(W× D×H)	260mm ×226mm× 47mm (10.2" × 8.9"×1.8")	260mm ×226mm× 47mm (10.2" × 8.9"×1.8")	380mm ×318mm× 53.50mm (14.96" × 12.51"×2.1")
WEIGHT (WITHOUT HDD)	≤1.1 Kg (2.42lb)	≤1.1 Kg (2.42lb)	≤2.0 Kg (4.4lb)
NDAA COMPLIANT	Yes	Yes	Yes

Alibi Vigilant Cameras: The Latest Technology

Advanced Optics and Chipsets = Better Video



Starlight Technology Delivers Color in Low Light

Advanced Starlight chipsets produce amazing color video in ultra-low light conditions. The imagers utilize ambient light sources to create high quality, color video at night.



Quality Lenses = Better Video

Don't settle for cheaper models that use plastic lenses. Vigilant cameras feature glass lenses that provide higher quality, crisper video. Deliver high quality video footage to your customers with every Vigilant model. Better components mean better video capture.

YouTube See the difference with sample video on our website or YouTube channel

SmartSense Technology

SmartSense technology virtually eliminates false alarms for human and vehicle detection by employing AI learning

Look for our cameras that utilize AI deep learning algorithms to more accurately identify human and vehicle targets. The newest generation of cameras featuring this SmartSense technology is extremely accurate and significantly reduces false alarms.

- Accurate Human and Vehicle Detection
- Reduce False Triggers by up to 90%
- Saves Storage and Search Time

HUMAN
DETECTION



VEHICLE
DETECTION



Powerful LEDs Light Up the Night for Color 24/7

Select Vigilant models feature IllumiNite technology - white light LEDs built in by the lens. These powerful white light LEDs can be set on a schedule or activated by PIR in order to act as a deterrent and more importantly to illuminate the FOV so you deliver color video all day and all night.

Camera Integrations Help You Win More Jobs

Alibi Security works with leading providers in the security industry to give you the ability to include Alibi gear in a wide variety of applications. Alibi cameras integrate with the following providers. Contact your account manager for more information.




Advanced IR Features

The latest advancements in infrared technology help to deliver crisp, high-contrast images in the dark. Look for Smart IR and Full-frame Illumination technology if you want great nighttime images.

- **Smart IR** - auto-throttles IR illumination based on object distance, eliminating bounce back and blooming
- **Full-Frame Illumination** - produces clearer, brighter images across the entire video frame (see inset to learn more)

These powerful features also deliver up to 30% energy savings over standard IR technology.

Benefits of Full Frame Illumination

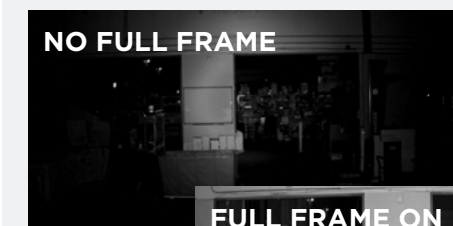

Full Frame Illumination is a cutting-edge, light-emitting illumination technology that offers better low light and nighttime surveillance capabilities than standard IR technology, plus:

1. Produces clearer, brighter images in low light and at night
2. Delivers a wider illumination spread
3. Unique rectangular IR LED design produces a uniformly illuminated image across the entire screen
4. Reduces overexposure at the center of the image and eliminates hot spots
5. Eliminates blooming from lights by reducing ambient light pollution
6. Reduces video noise for a clearer nighttime image, along with reducing bandwidth consumption and video storage requirements

Flex Series IP Cameras

Powerful features and technology make these cameras flexible for many applications

- WDR for crisp, clear color images
- Powerful, built-in Smart Analytics
- Ultra H.265 compression for lower storage needs
- Triple streams for better bandwidth management



IR anti-reflective 'window' reduces potential for IR bounceback from dome cover

2-axis/3-axis gimbal adjustments for a more precise FOV

All Vigilant cameras feature Smart IR and Full Frame Illumination for higher contrast nighttime images and less blooming

Flex Series IP Cameras | Turret Cameras

FIXED	FIXED	FIXED
2MP IP Fixed Turret Camera ALI-FT21-A	4MP Starlight IP Turret Camera ALI-FT41-UA	NEW! 4MP IP Turret IllumiNite Camera ALI-FT40-LA
2MP	4MP	4MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
112.9° FOV	105.3° FOV	110.4° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	Color: 0.0005lux (F1.0, AGC ON)
98' IR distance	98' IR distance	98' IR distance
IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.8"	5.1" x 4.3"	4.6" x 4.2"
NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-IN, ALI-SE45-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-I-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN

Flex Series IP Cameras | Dome Cameras

FIXED	FIXED	FIXED	FIXED	VARIFOCAL
2MP 98' IR Vandal-resistant IP Dome Camera ALI-FD20-VAW	2MP IP Vandal-Resistant Dome Camera ALI-FD21-V	4MP Starlight IP Vandal-Resistant Dome Camera ALI-FD41-VU	8MP Starlight Vandal Resistant IP Fixed Dome Camera with Built-in Microphone ALI-FD81-VUA	4MP Starlight 131' IR Varifocal Vandal-Resistant IP Dome Camera with Built-in Mic ALI-FD41-UVZ
2MP	2MP	4MP	8MP	4MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8-12mm motorized zoom lens
101° FOV	112.5° FOV	101.1° FOV	113° FOV	102.79-30.86° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.03	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR distance	98' IR distance	98' IR distance	98' IR distance	130' IR distance
IP67	IP67	IP67	IP67	IP67
-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range
4.29" x 3.3"	4.3" x 3.2"	4.3" x 3.2"	4.3 x 3.3	5.8" x 4.4"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN

FIXED	VARIFOCAL
8MP Starlight IP Fixed Turret Camera with Built-in Microphone ALI-FT81-UA	4MP Starlight Varifocal IP Turret Camera ALI-FT40-UZA
8MP	4MP
2.8mm fixed lens	2.8-12mm auto focus motorized zoom lens
113° FOV	102.79-30.86° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR distance	131' IR distance
IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.8"	5.1" x 4.3"
NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN



Low Prices Guaranteed on All Cable
If you find a lower price on same-spec cable, we'll match it or beat it. Call us today.

The Best Tech Support in the Industry

When you have problems you need solutions—not long wait times or poor advice. That's why we employ as many technical support agents as we do sales and product agents at our call center. Our team is here for you:

1.5
Average minutes to answer calls

9.7/10
Tech Support Dealer Rating

100%
Personnel in the United States

Flex Series IP Cameras | Bullet Cameras

FIXED	FIXED	FIXED	FIXED	FIXED	VARIFOCAL
2MP 98' Smart IR Wi-Fi Bullet Camera ALI-FB20-AW	2MP IP Bullet Camera ALI-FB21-A	NEW! 4MP IP Bullet IllumiNite Camera ALI-FB40-LA	4MP Starlight IP Mini Bullet Camera ALI-FB41-UA	8MP Starlight IP Mini Fixed Bullet Camera with Built-in Microphone ALI-FB81-UA	4MP Starlight 164 IR Varifocal IP Bullet Camera ALI-FB41-UZA
2MP	2MP	4MP	4MP	8MP	4MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8-12mm auto-focus and motorized zoom lens
101° FOV	112.5° FOV	110.4° FOV	101.1° FOV	113° FOV	102.79-30.86° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Color: 0.0005lux (F1.0, AGC ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.03	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR distance	98' IR distance	98' IR distance	164' IR distance	164' IR distance	164' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
6.5" x 2.5" x 2.5"	6.5" x 2.5" x 2.5"	8.1" x 2.9" x 2.9"	6.5" x 2.5" x 2.5"	7.5 x 2.9 x 2.8	8.1" x 2.9" x 2.9"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-JB05-A-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-UC08-C, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-UC08-C, ALI-UP06-C-IN

Performance Series IP Cameras | Turret Cameras

Performance Series IP Cameras

Our Performance Series cameras are built to handle more demanding jobs with advanced features and analytics built-in:

- Upgraded, robust, all-metal housing design
- More installation options including 3-axis gimbals
- More advanced analytics available in select models
- Wider variety of form factors and specialty models like PTZs and panos



FIXED	FIXED	FIXED
4MP Starlight SmartSense 98 Feet IR IP Turret Camera ALI-PT40-UAUI	4MP Starlight SmartSense IP Fixed Turret Camera with White Light Strobes and Audible Alarm ALI-PT40-UAIS	4MP Starlight SmartSense 98 Feet IR IP Turret Camera ALI-PT40-VLUAI
4MP	4MP	4MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
101° FOV	101° FOV	109° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON)
98' IR distance	98' IR distance	98' IR distance
IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.8"	4.6" x 3.8"	5.1" x 4.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN

FIXED	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
8MP Starlight SmartSense IllumiNite 98 Feet IR IP Turret Camera ALI-PT80-VLUAI	4MP Varifocal 98' IR Turret IP Camera with Audio ALI-PT40-UZAI	NEW! 4MP IP Vandal Turret IllumiNite Starlight SmartSense Camera ALI-PT40-VLUZAI	5MP Starlight Varifocal Vandal-resistant 131' IR IP Turret Camera ALI-PT50-UZAI	6MP Starlight IP Varifocal Turret Camera ALI-PT60-VUZA	8MP Starlight Varifocal Vandal-resistant 131' IR IP Turret Camera ALI-XT81-UZAI
8MP	4MP	4MP	5MP	6MP	8MP
2.8mm fixed lens	2.7-13.5mm automatic focusing and a motorized zoom lens	2.8-12mm, automatic focusing and motorized zoom lens	2.7-13.5mm, automatic focusing and a motorized zoom lens	2.7mm-13.5mm varifocal motorized lens	2.8-12 mm automatic focusing and a motorized zoom lens
110° FOV	98.26°-31.35° FOV	102.4°-49.2° FOV	106.25°-30.42° FOV	30°-106° FOV	107.4°-29.2° FOV
Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Colour: 0.0005 lux (F1.2, AGC ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR distance	131' IR distance	98' IR distance	131' IR distance	130' IR distance	131' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
5.1" x 4.3"	5.1" x 4.3"	5.1" x 4.3"	5.1" x 4.3"	5.1 x 4.3	5.1" x 4.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
5MP 66' IR Turret Camera ALI-PT50-VUAIF	5MP Starlight SmartSense 98 Feet IllumiNite LED IP Turret Camera w/ Built-in Mic ALI-PT50-LUAI	5MP Starlight SmartSense 98 Feet IR IP Turret Camera ALI-PT50-UAUI	6MP Starlight IP Fixed Turret Camera ALI-PT60-UA	6MP Starlight IP Fixed Turret Camera ALI-PT60-UAB	8MP 98 Feet IR Fixed IP Turret Camera ALI-PT81-AI
5MP	5MP	5MP	5MP	6MP	8MP
1.68mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
180° FOV	102° FOV	96° FOV	96° FOV	96° FOV	112.5° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01
66' IR distance	98' IR distance	98' IR distance	98' IR distance	98' IR distance	98' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.4" x 3.7"	4.4" x 3.7"	4.6" x 3.8"	4.4" x 3.7"	4.4" x 3.7"	5.0" x 3.7"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-JB03-G-IN-B, ALI-UC08-C, ALI-WM03-D-IN-B	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN

Color, All Day & All Night

Powerful IllumiNite™ white light LED, located below the lens, provides illumination bright enough to capture color images even in pitch-black conditions.

Feature powerful white light LEDs that illuminate the FOV for color 24/7

Features built in SmartSense capabilities to more accurately detect humans and vehicles, reducing false alarms

Starlight chipsets use ambient light to provide crisp color in extreme dark

All Flex Series and most Performance Series products meet the technical requirements set forth in NDAA Section 889 Part A for video security solutions. Visit alibisecurity.com/ndaa for more information.

Get Social With Us

Our Facebook page and YouTube channels help keep you up-to-date with the latest resources and promotions. Follow us on Facebook and subscribe to our YouTube channel to get the newest information first.

Performance Series IP Cameras | Dome Cameras

FIXED	FIXED	FIXED	FIXED
4MP Starlight SmartSense Mini-Wedge Vandal-resistant IP Fixed Dome Camera ALI-PM41-VAI	NEW! 4MP IP Starlight SmartSense Mini Dome Camera ALI-PM40-UAI	4MP Starlight SmartSense 98 Feet IR IP Dome Camera ALI-PD40-VUAI	5MP Starlight SmartSense 98 Feet IR IP Dome Camera ALI-PD50-VUAI
4MP	4MP	4MP	5MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
101° FOV	101° FOV	101.1° FOV	96.1° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR"	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR Distance	98' IR Distance	98' IR Distance	98' IR Distance
IP67	---	IP67	IP67
-31°F-140°F operating temperature range	-22°F-131° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range
4.28" x 2.43"	4.3" x 2.4"	4.3" x 3.2"	4.3" x 3.2"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN

Learning Opportunities 24/7/365

Sharpen Your Security Solution Skills!

The Alibi Security YouTube channel offers more than 200 videos to help you learn everything about video security.

Alibi Integration Center: Configuration & Customization

Our in-house integration services enhance your solution, simplify the installation process, and build your brand.

- **Recorder Configuration** Pre-install hard drives, and ensure all recorders ship with the latest firmware.
- **Custom Configuration** Pre-configure cameras, pair with recorders, and pre-set to your specifications.
- **OEM Configuration** Customize our gear with YOUR logo – keeping your brand top of mind with your customers.

Alibi Warehouse: Dealer Friendly Fulfillment

Our supply chain and fulfillment teams ensure that the products you need are in-stock and delivered on-time, regardless of your location.

- Consolidated Shipping**
All Alibi items on your order ship at the same time from ONE warehouse location.
- Fast, Free Shipping**
All orders qualify for FREE two day shipping and most orders placed by 3pm CT ship same day.
- Advanced Replacement**
In the unlikely event of product failure, we ship a replacement immediately, so your customer is never left waiting.

FIXED	FIXED
6MP Starlight IP Dome Camera ALI-PD60-VUA	6MP Starlight IP Dome Camera ALI-PD60-VUAB
6MP	6MP
2.8mm fixed lens	2.8mm fixed lens
96° FOV	96° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR Distance	98' IR Distance
IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.3" x 3.2"	4.3" x 3.2"
NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-JB03-G-IN-B, ALI-UC08-C, ALI-WM03-D-IN-B

DON'T JUST TAKE OUR WORD FOR IT!

What Our Dealers Are Saying

★★★★★

Extremely Satisfied Customer

The fact that we have been doing business with your company for over ten years speaks volumes more than anything I could possibly write here. It is not often one finds a company that offers quality products that are reasonably priced and backed by superb customer support, knowledgeable sales staff, and gives me the benefit of offering my clients a hassle-free warranty! I hope to be doing business with you for another ten years, at least.

-Nicholson Security, Lehigh Valley, PA

FIXED	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
8MP SmartSense Starlight IP Fixed Dome Camera ALI-PD81-AI	NEW! 4MP IP Vandal Dome Starlight SmartSense Camera ALI-PD41-VUZAI	5MP Starlight SmartSense Varifocal Vandal-Resistant 131' IR IP Dome Camera ALI-PD50-VUZAI	5MP Stainless Steel 65' IR Starlight IP Varifocal Dome Camera ALI-SD50-UZ	6MP Starlight IP Varifocal Dome Camera ALI-PD60-VUZA	8MP Starlight SmartSense Varifocal Vandal-Resistant 131' IR IP Dome Camera ALI-XD81-VUZAI
8MP	4MP	5MP	5MP	6MP	8MP
2.8mm fixed lens	2.7-13.5mm Motorized VF	2.7-13.5mm auto focus motorized zoom lens	2.8-12mm varifocal lens	2.7-13.5mm motorized varifocal lens	2.8-12mm auto focus motorized zoom lens
112.5° FOV	103.58°-31.05° FOV	106.25°-30.42° FOV	107° (W)-33.5° (T) FOV	30°-106° FOV	107.4°- 29.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR Distance	98' IR Distance	131' IR Distance	65' IR Distance	130' IR Distance	131' IR Distance
IP67	IP66	IP67	IP68	IP67	IP67
-22°F-140°F operating temperature range	-22°F-131°F operating temperature range	-22°F-140°F operating temperature range	32°-122° operating temperature range	-22°F-140° operating temperature range	-22°F-140° F operating temperature range
4.3" x 3.2"	5.04" x 3.94"	5.8" x 4.4"	3.14" x 4.64" x 3.48"	5.8" x 4.4"	5.8" x 4.4"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-FM152-A-IN, ALI-JB04-C-IN, ALI-JB07/WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM04-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM04-IN	Compatible brackets: no compatible brackets	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-FM152-A-IN, ALI-JB04-C-IN, ALI-JB07/WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM04-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM04-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-FM152-A-IN, ALI-JB04-C-IN, ALI-JB07/WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM04-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM04-IN

Performance Series IP Cameras | **Bullet Cameras**

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
ALI-PB40-UAIS	ALI-PB40-UAI	ALI-PS40-A	ALI-PB40-UAIE	ALI-PB40-VLUAI	ALI-PB50-VLUAI
4MP	4MP	4MP	4MP	4MP	5MP
2.8mm fixed lens	2.8mm fixed lens	4.0mm fixed lens	4.0mm fixed lens	4.0mm fixed lens	4.0mm fixed lens
101° FOV	101.1° FOV	78° FOV	83.6° FOV	103° FOV	80.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.02	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001
98' IR Distance	131' IR Distance	164' IR Distance	262' IR Distance	98' IR Distance	98' IR Distance
IP67	IP67	IP66	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
8.1" x 2.9" x 2.9"	6.1" x 2.5" x 2.5"	14.1" x 4.2" x 7.7"	8.1" x 2.9" x 2.9"	9.6" x 3.4" x 3.3"	9.7" x 3.4" x 3.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-UC08-C, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN

VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
ALI-XB20-VUZAI-ANPR	ALI-PB40-UZAI	ALI-PB40-VUZAIE	ALI-PB40-VLUZAI	ALI-SB50-UZ	ALI-PB50-UZAI
2MP	4MP	4MP	4MP	5MP	5MP
4.7-47mm motorized zoom lens	2.7-13.5mm auto focus motorized zoom lens	2.8-12mm varifocal lens	2.8-12mm automatic focusing and motorized zoom lens	2.8-12mm varifocal lens	2.7-13.5mm auto focus motorized zoom lens
58.9°H FOV	98.26°- 31.35° FOV	42.6°-113.7° FOV	102.4°- 49.2° FOV	107° (W)-33.5° (T) FOV	106.25°- 30.42° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.0005	Color: 0.0005 lux (F1.2, AGC ON), 0 lux with IR/LED on	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002
165' IR Distance	164' IR Distance	262' IR Distance	98' IR Distance	131' IR Distance	164' IR Distance
IP67	IP67	IP67	IP67	IP68	IP67
-40°F-140°F operating temperature range	-22°F-140°F operating temperature range	-40°F-158°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-140°F operating temperature range
15.2" x 5.1"	9.7" x 3.4" x 3.4"	5.1" x 12.7"	9.6" x 3.4" x 3.3"	2.83" x 6.63" x 4.72"	9.7" x 3.4" x 3.4"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: No compatible brackets	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
ALI-PB50-UAI	ALI-PB50-UAIF	ALI-PB60-UA	ALI-PB60-UAB	ALI-PB81-AI	ALI-PB80-VLUAI
5MP	5MP	6MP	6MP	8MP	8MP
2.8mm fixed lens	1.68mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	4mm fixed lens
96.1° FOV	180° FOV	96° FOV	96° FOV	112.4° FOV	94° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0 lux (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001
131' IR Distance	66' IR Distance	131' IR Distance	131' IR Distance	98' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
6.1" x 2.5" x 2.5"	7.8" x 2.8" x 2.8"	6.1" x 2.5" x 2.5"	6.1" x 2.5" x 2.5"	7.5" x 3.0" x 2.9"	9.6" x 3.4" x 3.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-JB05-A-IN-B, ALI-UC08-C	Compatible brackets: ALI-A01-IN, ALI-JB05-B-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN

Alibi Vigilant Mobile App















- Simple set up using a P2P account ... no more port-forwarding!
- Centrally manage user rights & permissions for an unlimited number of recorders or cameras
- Supports up to 256 channels
- Activate cloud firmware updates directly from the app
- Take snapshots or record live video directly from your mobile device
- Store up to 16 Alibi devices at once
- Add, delete, or modify connected devices
- Manage PTZ camera controls using your touchscreen
- Digitally zoom in during live video or remote playback modes
- Mix and match live views to access multiple Alibi recorders and IP cameras
- Compatible with Alibi Vigilant DVRs, NVRs, IP cameras and PTZs



VARIFOCAL	VARIFOCAL	VARIFOCAL
ALI-PB60-VUZA	ALI-PB80-VUZAIE	ALI-XB81-UZAI
6MP	8MP	8MP
2.7-13.5mm auto focus motorized zoom lens	2.8-12mm varifocal lens	2.8-12mm auto focus motorized zoom lens
30°-106° FOV	48°-101° FOV	107.4°-29.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
164' IR Distance	262' IR Distance	164' IR Distance
IP67	IP67	IP67
-22°F-140°F operating temperature range	-40°-140°F operating temperature range	-22°F-140°F operating temperature range
9.6" x 3.4" x 2.8"	5.1" x 12.7"	9.6" x 3.4" x 2.8"
NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN

Performance Series IP Cameras | PTZ Cameras

FIXED	FIXED	FIXED	FIXED	VARIFOVAL	VARIFOVAL
					
4MP Starlight IllumiNite Dual-Lens Panoramic Fixed IP Bullet Camera ALI-PF40-LUA	5MP IP Vandal-Resistant Fisheye Dome Camera with Built-in Alarm/Audio ALI-PF51-VA	5MP Starlight Corner Mount Fixed IP Camera ALI-XS50-UVA	12MP IP Vandal-Resistant Fisheye Fixed Dome Camera ALI-XF120-VAI	2MP IllumiNite Starlight SmartSense Dual-lens 164' IR PTZ Camera ALI-PZ20-LUZAI	2MP Starlight 33x IP PTZ Dome Camera ALI-PZ21-UZA
4MP	5MP	5MP	12MP	2MP	2MP
2.8mm fixed lens	1.4mm fixed lens	2.8mm fixed lens	1.8mm fixed lens	4X optical zoom	4.5-148.5mm auto focus motorized zoom lens
160° FOV	360° FOV	106° FOV	360° FOV	Pano 102.4° PTZ 106.6° - 30.6°	56.2°-2.6° FOV
Lux (B/W): 0.0005 (0.0 with light) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.03	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001
98' IR Distance	33' IR Distance	33' IR Distance	49' IR Distance	164' IR Distance	492' IR Distance
IP67	IP66	IP66	IP67	IP66	IP66
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	32°F-122°F operating temperature range	-22°F-140°F operating temperature range	-4°F-140°F operating temperature range	-40°F-149°F operating temperature range
10.7" x 5.1" x 3.0"	4.9" x 1.7"	7.48" x 1.57" x 1.66"	5.9" x 2.2"	5.3" x 7.6" x 11.9" (Wall Mount), 5.3" x 6.1" x 14.3" (Ceiling Mount)	8.9" x 14.2"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: No compatible brackets	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB04-D-IN, ALI-JB07-WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C	Compatible brackets: ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN	Compatible brackets: ALI-CE45-IN, ALI-JB12-IN, ALI-SE45-A-IN, ALI-SE45-IN, ALI-UC08-A-IN, ALI-UC08-B-IN, ALI-UF45-A-IN, ALI-UP08-A-IN, ALI-UP08-B-IN, ALI-WE45-A-IN, ALI-WE45-B-IN, ALI-WE45-IN

VARIFOVAL	VARIFOVAL	VARIFOVAL	VARIFOVAL	VARIFOVAL	VARIFOVAL
					
4MP Starlight SmartSense 25x IP PTZ Camera ALI-PZ40-VUZAI	NEW! 4MP Dual Lens IP 25X PTZ Starlight SmartSense Camera ALI-PZ40-UZAI	NEW! 4MP Starlight SmartSense 25x IP PTZ Camera with Wall Mount Included ALI-PZ40-VUZAI-B	5MP IllumiNite Starlight SmartSense 4X IP Varifocal Mini-PTZ Camera with Active Deterrence ALI-PZ50-LUZAIS	5MP Starlight 5X 98 Feet IR Indoor Wi-Fi Mini PTZ Network Camera ALI-PZ51-UZA	NEW! 16MP 164 foot IR IP Starlight Panoramic Network Camera ALI-XF160-UA
4MP	4MP	4MP	5MP	5MP	16MP
4.8-120mm motorized varifocal zoom lens	4.8-120 mm motorized varifocal zoom lens & 4mm fixed lens	4.8-120mm varifocal lens	2.8-12mm motorized varifocal zoom lens	2.7-13.5mm auto focus motorized zoom lens	4 x 2.8mm lens
2.7°-52.2° FOV	3.09-55.46° FOV & 91.3° FOV	---	30.6°-104.1° FOV	27.9-98.3° FOV	180° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Color:0.003 lux (F1.6, AGC ON) 0 lux with IR	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	---
328' IR Distance	328' IR Distance	328' IR Distance	164' IR Distance	98' IR Distance	164' IR Distance
IP67	IP66	IP67	IP66	---	IP67
-40°F-158°F operating temperature range	-40°F-149°F operating temperature range	-40°F-158°F operating temperature range	-4°F-140°F operating temperature range	-40°F-158°F operating temperature range	-40°F-158° operating temperature range
6.5" x 11.6"	6.4" x 12.0"	6.5" x 11.6"	5.2" x 10.6"	5.1" x 5.7"	10.2" x 8.3" x 4.5"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	No
Compatible brackets: ALI-CE45-IN, ALI-JB12-IN, ALI-SE45-A-IN, ALI-SE45-IN, ALI-UC08-A-IN, ALI-UC08-B-IN, ALI-UF45-A-IN, ALI-UP08-A-IN, ALI-UP08-B-IN, ALI-WE45-A-IN, ALI-WE45-B-IN, ALI-WE45-IN	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-CE45-IN, ALI-JB12-IN, ALI-SE45-A-IN, ALI-SE45-IN, ALI-UC08-A-IN, ALI-UC08-B-IN, ALI-UF45-A-IN, ALI-UP08-A-IN, ALI-UP08-B-IN, ALI-WE45-A-IN, ALI-WE45-B-IN	Compatible brackets: ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	Compatible brackets: ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	Compatible brackets: ALI-CM06-C-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-IN, ALI-UV06-C-IN, ALI-WE45-D-IN

PREVENT CRIME BEFORE IT HAPPENS

Active Deterrence Cameras Can Provide Proactive Protection



- Flashing LED lights to alert perpetrators they have been detected
- High decibel alarm and audible message warn them to Leave
- Starlight chipsets help capture color detail in low light conditions
- Create custom warning messages that can be uploaded and played

Watch our YouTube videos to learn more about Active Deterrent Cameras



Flex HD Series Cameras | Turret Cameras

FIXED	FIXED	FIXED	FIXED
2MP HD-TVI/AHD/CVI/CVBS Fixed Turret Security Camera ALI-AT20	2MP IllumiNite Starlight Fixed HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT20-LU	2MP IllumiNite Starlight Fixed HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT20-LU28	2MP Starlight HD-TVI/AHD/CVI/CVBS Fixed Turret Security Camera ALI-AT21-U
2MP	2MP	2MP	2MP
3.6mm fixed lens	3.6mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
79° FOV	88° FOV	107° FOV	89° FOV
Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)
65' IR Distance	85' IR Distance	85' IR Distance	65' IR Distance
IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range
3.66" x 2.91"	4.29" x 3.66"	4.29" x 3.66"	3.72" x 3.25"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-JB1, ALI-WB1	Compatible brackets: ALI-JB2, ALI-WB1	Compatible brackets: ALI-JB2, ALI-WB1	Compatible brackets: ALI-JB3

We're Your Full-Service Security Solutions Partner

Our comprehensive range of professional services gives you a competitive advantage, enabling you to provide your customers with the best possible solution and service for their specific applications.

Product Configuration Services:

- Extended Burn-in
- Pre-programming and Configuration
- Custom Labeling
- Custom Solution Integration

Project Pre-Sale Consulting

- Pre-sale system design assistance
- Scalability assessments
- Large project rollout design

FIXED	FIXED	FIXED	FIXED	FIXED	VARIFOCAL
5MP Starlight HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT51-UZ	NEW! 5MP IllumiNite 131ft 4-in-1 Fixed Turret Security Camera ALI-AT52-LA	NEW! 5MP Starlight 131ft 4-in-1 Fixed Turret Security Camera ALI-AT52-UA	8MP Starlight HD-TVI/AHD/CVI/CVBS Turret Security Camera ALI-AT80-AU	8MP White Light HD-TVI/AHD/CVI/CVBS Turret Security Camera ALI-AT80-AL	2MP HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT20-Z
5MP	5MP	5MP	8MP	8MP	5MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	2.8-12mm manual zoom lens
107° FOV	111.5° FOV	109.1° FOV	107° FOV	90° FOV	94° - 32° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	.005 Lux	.005 Lux	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)
65' IR Distance	131' IR Distance	131' IR Distance	65' IR Distance	80' IR Distance	100' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	-22°F-122°F operating temperature range	-22°F-122°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range
3.66" x 2.91"	4.37" x 3.78"	4.37" x 3.78"	3.66" x 2.91"	4.29" x 3.66"	4.68" x 3.85"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-JB7	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-JB1, ALI-WB1	Compatible brackets: ALI-JB2, ALI-WB1	Compatible brackets: ALI-JB2, ALI-WB2

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
NEW! 2MP IllumiNite 131ft 4-in-1 Fixed Turret Security Camera ALI-AT22-LA	NEW! 2MP Starlight 131ft 4-in-1 Fixed Turret Security Camera ALI-AT22-UA	NEW! 4MP Starlight 131ft 4-in-1 Fixed Turret Security Camera ALI-AT42-UA	5MP 65 ft IR 4-in-1 HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT50-AOC	5MP Starlight White Light HD-TVI/AHD/CVI/CVBS Turret Security Camera ALI-AT50-LAOC	5MP Starlight HD-TVI/AHD/CVI/CVBS Vandal Resistant Fixed Dome Camera ALI-AT51-U
2MP	2MP	4MP	5MP	5MP	5MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	3.6mm fixed lens	2.8mm fixed lens
101.5° FOV	101.5° FOV	97.7° FOV	90° FOV	91° FOV	91° FOV
.005 Lux	.005 Lux	.005 Lux	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01
131' IR Distance	131' IR Distance	131' IR Distance	65' IR Distance	82' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-122°F operating temperature range	-22°F-122°F operating temperature range
4.4" x 3.78"	4.4" x 3.78"	4.4" x 3.78"	4.29" x 3.66"	3.72" x 3.26"	3.72" x 3.26"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	Compatible brackets: ALI-JB1, ALI-WB1	Compatible brackets: ALI-JB2, ALI-WB1	Compatible brackets: ALI-JB3

VARIFOCAL	VARIFOCAL	VARIFOCAL	FIXED
5MP Starlight HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT50-UZ	5MP Starlight HD-TVI/AHD/CVI/CVBS Turret Security Camera ALI-AT50-VUZ	8MP (4K) HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT80-Z	2MP Starlight HD-TVI/AHD/CVI Fixed Lens Box Camera ALI-AX20-U
5MP	5MP	8MP	2MP
2.7-13.5mm auto focus motorized zoom Lens	2.7-13.5mm motorized varifocal lens	2.7-13.5mm motorized varifocal lens	---
103° - 29° FOV	103° - 29° FOV	103° - 29° FOV	---
Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	---
100' IR Distance	131' IR Distance	130' IR Distance	---
IP67	IP67	IP67	---
14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F - 140°F operating temp range
4.68" x 3.85"	4.68" x 3.85"	4.29" x 3.66"	5.82" x 3.11" x 2.24"
NDAA Compliant	NDAA Compliant	NDAA Compliant	---
Compatible brackets: AJ1, ALI-JB2, ALI-WB2, WB02	Compatible brackets: ALI-WB2	Compatible brackets: ALI-WB2	Compatible brackets: No compatible brackets

Real Time Pricing Guarantee

Every day, we shop our competitors*, and adjust our prices on like products to deliver you the best value.





See a better price on the same product?


Call us! And we'll match it—or better it!

Log in to your Partner account for your **real-time LOW PRICES.**

*Competitors are defined in collaboration with our Partners. Competitive products are comparable in specification, function and warranty. Competitive suppliers offer value-added services, such as inventory management, technical support, and returns management.

Flex HD Series Cameras | Dome Cameras

FIXED	FIXED	FIXED	FIXED
			
2MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Dome Security Camera	NEW! 2MP Starlight 98ft 4-in-1 Vandal-Resistant Fixed Dome Security Camera	5MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Vandal Resistant Fixed Dome Security Camera	NEW! 5MP Starlight 98ft 4-in-1 Vandal-Resistant Fixed Dome Security Camera
ALI-AD21-U	ALI-AD22-VUA	ALI-AD51-U	ALI-AD52-VUA
2MP	2MP	5MP	5MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
101° FOV	101.5° FOV	91° FOV	109.1° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	0.005 lux	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	0.005 lux
65' IR Distance	98' IR Distance	65' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.45"	4.29" x 3.25"	4.6" x 3.45"	109" x 3.25"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:
ALI-JB4	ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	ALI-JB4	ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN

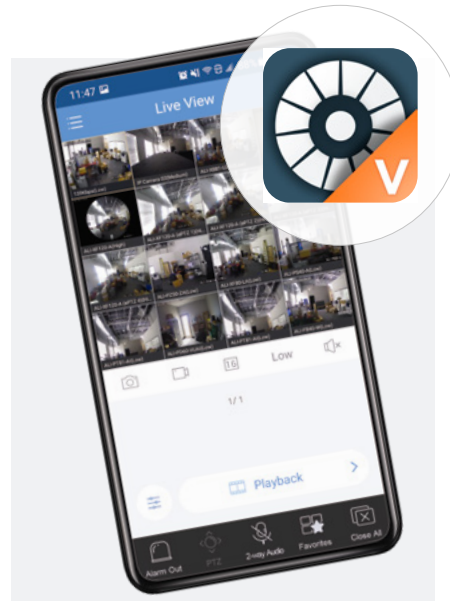







Alibi Vigilant Mobile App

- Simple set up using a P2P account ... no more port-forwarding!
- Centrally manage user rights & permissions for an unlimited number of recorders or cameras
- Supports up to 256 channels
- Activate cloud firmware updates directly from the app
- Take snapshots or record live video directly from your mobile device
- Store up to 16 Alibi devices at once
- Add, delete, or modify connected devices
- Manage PTZ camera controls using your touchscreen
- Digitally zoom in during live video or remote playback modes
- Mix and match live views to access multiple Alibi recorders and IP cameras
- Compatible with Alibi Vigilant DVRs, NVRs, IP cameras and PTZs



Flex HD Series Cameras | Bullet Cameras

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Starlight 85 Feet IllumiNite LED Fixed Bullet Security Camera	2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera	2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera	2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Starlight 85 Feet IllumiNite LED Fixed Bullet Security Camera	2MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera	NEW! 2MP IllumiNite 131ft 4-in-1 Fixed Bullet Security Camera
ALI-AB20-UL28	ALI-AB20	ALI-AB20-U	ALI-AB20-UL2	ALI-AB21-U	ALI-AB22-LA
2MP	2MP	2MP	2MP	2MP	2MP
2.8mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
89° FOV	79° FOV	79° FOV	88° FOV	89° FOV	101.5° FOV
Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	.005 Lux Rating
100' IR Distance	80' IR Distance	200' IR Distance	85' IR Distance	100' IR Distance	131' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-140°F operating temperature range
6.6" x 2.93" x 2.93"	6.73" x 2.87" x 2.75"	6.65" x 2.65" x 2.75"	8.66" x 4.13" x 4.29"	6.6" x 2.93" x 2.93"	6.2" x 2.62" x 2.62"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:
ALI-JB1	ALI-JB1	ALI-JB2	ALI-JB1	ALI-JB3	ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
NEW! 2MP 4-1 Bullet 131 ft IR Starlight 2.8mm DWDR Built-in Mic	NEW! 4MP 4-1 Bullet 131 ft IR Starlight 2.8mm DWDR Built-in Mic	NEW! 5MP 4-1 Bullet 131 ft IR Starlight 2.8mm DWDR Built-in Mic	NEW! 5MP 4-1 Bullet 131 ft IllumiNite 2.8mm DWDR Built-in Mic	5MP HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera	5MP Starlight 80' White Light HD-TVI/AHD/CVI/CVBS Bullet
ALI-AB22-UA	ALI-AB42-UA	ALI-AB52-UA	ALI-AB52-LA	ALI-AB50	ALI-AB50-LU
2MP	4MP	5MP	5MP	5MP	5MP
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	3.6mm fixed lens	3.6mm fixed lens
101.5° FOV	97.7° FOV	109.1° FOV	111.5° FOV	90° FOV	90° FOV
.005 Lux Rating	0.005 lux (F1.6, AGC ON) 0 lux (IR ON)	.005 Lux Rating	0.005 lux (F1.4, AGC ON) 0 lux (white light on)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)
131' IR Distance	131' IR Distance	131' IR Distance	131' IR Distance	80' IR Distance	80' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range
6.06" x 2.60" x 2.60"	6.06" x 2.60" x 2.60"	6.06" x 2.60" x 2.60"	2.26" x 2.62" x 2.62"	6.73" x 2.87" x 2.75"	6.73" x 2.87" x 2.75"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:	Compatible brackets:
ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	ALI-JB1	ALI-JB1



FIXED	FIXED	VARIFOCAL	VARIFOCAL	VARIFOCAL
SMP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Varifocal Bullet Camera ALI-AB51-U	8MP Starlight HD-TVI/AHD/CVI/CVBS Bullet Security Camera ALI-AB80-U	2MP Starlight Varifocal HD-TVI/AHD/CVI/CVBS Bullet Camera ALI-AB20-UZ	5MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Varifocal Bullet Camera ALI-AB51-UZ	5MP Starlight HD-TVI/AHD/CVI/CVBS Varifocal Bullet Security Camera ALI-AB50-UZ
5MP	8MP	2MP	5MP	5MP
2.8mm fixed lens	3.6mm fixed lens	2.7-13.5mm motorized varifocal lens	2.8-12mm varifocal lens	2.7-13.5mm varifocal lens
91° FOV	88° FOV	103°-29° FOV	91.2°-33.4° FOV	103°-29° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON)
100' IR Distance	80' IR Distance	130' IR Distance	165' IR Distance	130' IR Distance
IP67	IP67	IP67	IP67	IP66
-22°F-122°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-122°F operating temperature range	14°F-122°F operating temperature range
6.59" x 2.93" x 2.93"	6.73" x 2.87" x 2.75"	8.66" x 4.13" x 4.29"	8.51" x 3.16" x 3.16"	7.04" x 3.70" x 3.66"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
Compatible brackets: ALI-JB3	Compatible brackets: ALI-JB1	Compatible brackets: ALI-JB2	Compatible brackets: ALI-JB3	Compatible brackets: ALI-JB2

Brackets and Accessories

ALI-A01-IN Junction Box Waterproof Joint	ALI-CE45-IN Pendant Mount	ALI-CM06-C-IN Pendant Mount	ALI-CM24-IN Pendant Mount	ALI-FM152-A-IN In-ceiling Mount	ALI-JB03-G-IN Junction Box
ALI-JB03-G-IN-B Junction Box	ALI-JB03-H-IN Junction Box	ALI-JB03-I-IN Junction Box	ALI-JB03-J-IN Junction Box	ALI-JB04-C-IN Junction Box	ALI-JB04-D-IN Junction Box
ALI-JB05-A-IN Junction Box	ALI-JB05-A-IN-B Junction Box	ALI-JB05-B-IN Junction Box	ALI-JB06-A-IN Junction Box	ALI-JB07/WM03-F-IN Junction Box with Wall Mount	ALI-JB07/WM03-G-IN Junction Box with Wall Mount
ALI-JB07/WM04-B-IN Junction Box with Wall Mount	ALI-JB07-D-IN Junction Box	ALI-JB12-IN Junction Box	ALI-SE24-IN Pendant Mount	ALI-SE24-A-IN Pendant Mount	ALI-SE45-IN Pendant Mount
ALI-SE45-A-IN Pendant Mount	ALI-SM04-IN Electric-box Transfer Plate	ALI-UC08-A-IN Corner Mount	ALI-UC08-B-IN Corner Mount	ALI-UC08-C Corner Mount	ALI-UF45-A-IN Pendant Mount
ALI-UF45-H-IN Plate Adapter	ALI-UP06-IN Pole Mount	ALI-UP06-B-IN Pole Mount	ALI-UP06-C-IN Pole Mount	ALI-UP08-A-IN Pole Mount	ALI-UP08-B-IN Pole Mount (Steel)
ALI-UM06-E-IN Tilted Mount	ALI-UV06-C-IN 2D Bracket Mount	ALI-WE45-IN PTZ Short Wall Mount	ALI-WE45-A-IN PTZ Long Wall Mount	ALI-WE45-B-IN PTZ Parapet Wall Mount	ALI-WE45-D-IN Pano Wall Mount
ALI-WM03-B-IN Wall Mount	ALI-WM03-D-IN Wall Mount	ALI-WM04-IN Wall Mount			

Public View Monitor

Multi-use Public View Display Security Monitors deter theft in high-traffic and self-checkout areas. Add advertisements in full screen, banner, and switching modes. Deterrence audio can also be added to trigger warning sound clips.

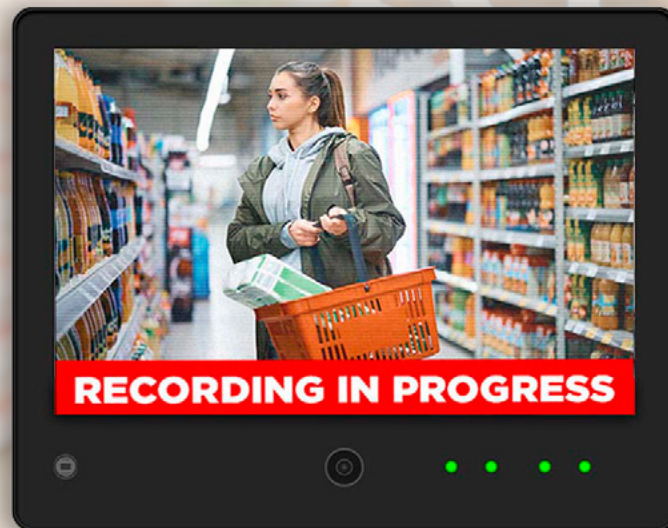

10.1 Inch Public View Display Security Monitor with Built-In 2MP Fixed IP Camera
ALI-PVM10L



Mount and Clamp for 10 inch PVM
ALI-PVM10M



LEARN MORE

Get the more out of your PVM monitor!

ALIBI® Hybrid Cloud

Cloud Backup + AI Analytics

Enhance Your On Premise Video Security System

What would you do if your traditional security solution failed to capture footage during a critical event? If your camera was offline or your hard drive had stopped recording, you would be unable to retrieve the proper video evidence needed.

Alibi Hybrid Cloud provides an additional layer of protection by allowing you to activate off-premise cloud-based video storage and advanced AI analytics in combination with your traditional security system.

Key Benefits of Alibi Hybrid Cloud:

- Video is captured at the on-premise recording device AND in the cloud for redundant storage of important events
- Advanced AI analytics engine reduces false alarms by up to 95%
- Built-in health monitoring capabilities alert you if the part of the system goes down.
- Handles unlimited camera count for cloud recording

Scalable Cloud Recording Solutions

Choose as many, or as few, cameras as you like to have video events captured and available in the cloud for up to six months. That way you can ensure your mission-critical footage is always available.

Powerful AI-based Analytics Include:

- ✓ Human Detection
- ✓ Vehicle Detection
- ✓ Gun Detection
- ✓ Object Left Behind
- ✓ Loitering Detection & More



For more information or to schedule a demo visit alibisecurity.com/hybrid-cloud

Schedule a live demo with our Alibi Hybrid Cloud Specialist: **888.858.1438**

ALIBI HYBRID CLOUD IS POWERED BY



ALIBI® Cloud VS

Camera-to-Cloud Video Surveillance

Simple, Scalable & Secure

Alibi Cloud VS is a cost-effective solution that allows you to stream and retain video surveillance footage in an ultra-secure cloud environment. Alibi Cloud VS is engineered to deliver cutting-edge reliability, scalability and cyber-security.

1

Simply install compatible cloud-enabled IP camera(s) and connect to your pre-set Alibi Cloud VS account via WiFi or LAN

2

Video footage streams directly to our ultra-secure, T4 level data center for storage


3

Easily view live or recorded video via mobile devices or on any browser on the web.



Alibi Cloud VS Adds to Your Bottom Line

- **Up-Front Revenue** Earn revenue on your installation of cameras and installation services
- **Revenue Each Month** Build Recurring monthly revenue on cloud subscriptions
- **Quicker Installations** Eliminates the need for extra wiring, recording devices and bridges to configure
- **More Secure** Adhere to state or federal requirements for off-premise video storage, retention and access
- **Fewer Service Calls** No recorders or hard drives to fix along with continuous firmware, security, and software updates via the cloud



Contact your dedicated account manager to learn more about cloud-enabled cameras

Alibi Cloud VS Features

Auto Backup Sync

Alibi Cloud VS supports micro SD card backup and syncing. If the internet goes out footage automatically records to the SD card and syncs back to the cloud when service is restored.

Easy Browser Access

No apps are required! Our web portal allows you to view live and recorded video and to manage system settings all through your favorite browser.

Dealer Dashboard

The Dealer Dashboard portal gives you visibility to all your subscriptions, reporting tools, health info and remote support tools.

Schedule a live demo with our Alibi Cloud VS Specialist: **877.917.9057**

ALIBI CLOUD VS IS POWERED BY



**We Proudly Sell and Support
Products from These Partners:**



Visit our website for our complete assortment of gear and accessories from these trusted providers.